

大榮牌雙推力軸承泵浦

DA-RONG DOUBLE PUSH BEARING SUBMERSIBLE PUMPS

SUS
60HZ


FC
60HZ

AB
Series

井用系列 FOR DEEP WELLS



性能曲線表

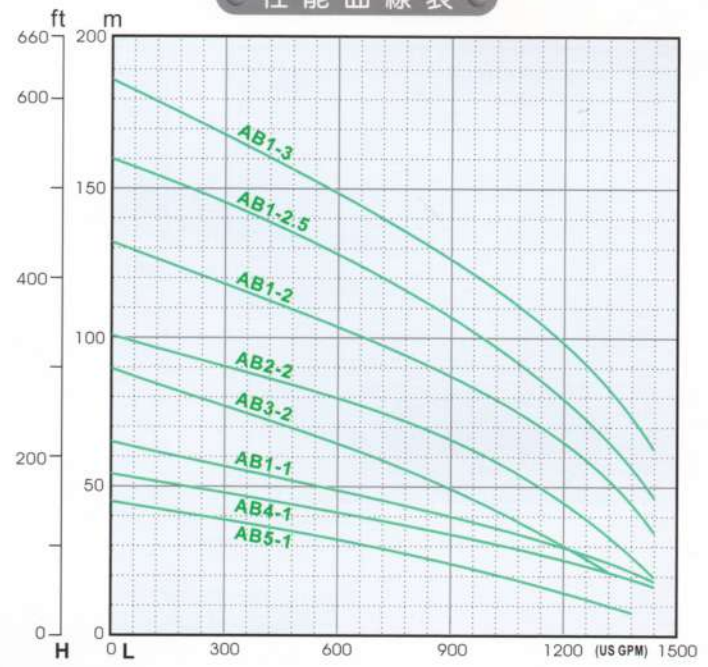

尺寸規格表

適井用徑	型式 TYPE	A mm	B mm	C mm	D mm	E mm	φ M mm	φ P mm
14"	AB5-1	1217	845	372	150	245	195	245
	AB4-1	1267	895	372	150	245	195	245
	AB1-1	1351	979	372	150	245	195	245
	AB3-2	1610	1050	560	150	245	216.3	245
	AB2-2	1690	1130	560	150	245	216.3	245
	AB1-2	1860	1300	560	150	245	216.3	245
	AB1-2.5	2188	1438	750	150	245	216.3	245
	AB1-3	2408	1658	750	150	245	216.3	245

性能規格表

適井用徑 (In)	Model 型式 TYPE	Output 馬力 HP	Disc. 口徑 Inch	Head 標準揚程 M	Capacity 標準水量 GPM	Max.H 最高揚程 M	Max.C 最大水量 GPM	滿載電流 3/220	滿載電流 3/380	滿載電流 3/440
14"	AB5-1	30	6-8	30	720	46	1380	84	48	42
	AB4-1	40	6-8	35	860	53	1460	112	64	56
	AB1-1	50	6-8	42	860	65	1460	140	80	70
	AB3-2	60	6-8	58	720	90	1380	168	96	84
	AB2-2	75	6-8	66	860	102	1460	210	120	105
	AB1-2	100	6-8	87	860	133	1460	260	160	140
	AB1-2.5	120	6-8	110	860	108	1460		180	156
	AB1-3	150	6-8	126	860	187	1460		225	195