
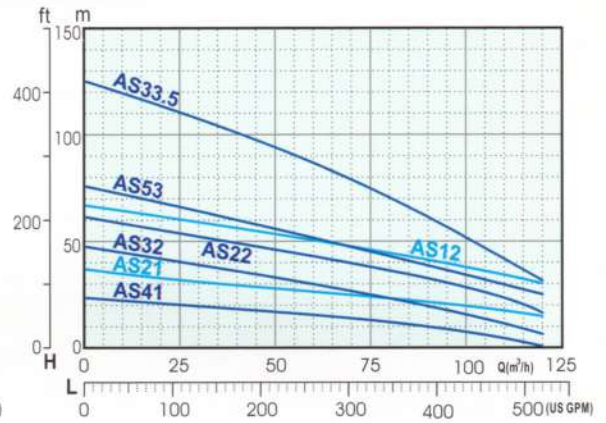


大榮牌全不銹鋼泵浦

DA-RONG STAINLESS STEEL SUBMERSIBLE PUMPS

SUS & FC

性能曲線表

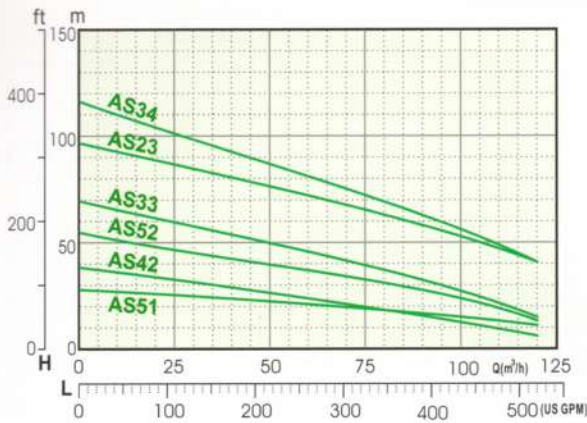

尺寸規格表

適井用徑	型式 TYPE	A mm	B mm	C mm	D mm	E mm	φM mm	φP mm
8"	AS41	748	448	300	95	173	165	165
	AS51	784	484	300	95	173	165	165
	AS42	904	484	420	95	173	165	165
	AS21	883	583	300	95	173	165	165
	AS32	1003	583	420	95	173	165	165
	AS52	1052	632	420	95	173	165	165
	AS33	1172	632	540	95	173	165	165
	AS22	1110	690	420	95	173	165	165
	AS53	1230	690	540	95	173	165	165
	AS12	1180	760	420	95	173	165	165
	AS23	1342	802	540	95	173	165	165
	AS34	1462	802	660	95	173	165	165
	AS33.5	1541	881	660	95	173	165	165



性能規格表

適井用徑 (In)	Model 型式 TYPE	Output 馬力 HP	Disc. 口徑 Inch	Head 標準揚程 M	Capacity 標準水量 GPM	Max.H 最高揚程 M	Max.C 最大水量 GPM	滿載電流 3/220	滿載電流 3/380	滿載電流 3/440
8"	AS41	5	4	13	330	23	550	15	8.5	7.5
	AS51	7.5	4	18	330	28	550	23	13	10.5
	AS42	7.5	4	19	330	38	550	23	13	10.5
	AS21	10	4~5	25	350	36	550	30	17	15
	AS32	10	4~5	30	350	47	550	30	17	15
	AS52	15	4~5	34	330	54	550	45	25	22
	AS33	15	4~5	44	330	69	550	45	25	22
	AS22	20	4~5	38	350	61	550	56	32	30
	AS53	20	4~5	48	330	75	550	56	32	30
	AS12	25	4~5	43	350	67	550	70	40	37.5
	AS23	30	4~5	63	350	97	550	84	48	42
	AS34	30	4~5	70	350	116	550	84	48	42
	AS33.5	35	4~5	77	330	125	550	98	56	49



大榮電機股份有限公司
DA-RONG ELECTRIC CO., LTD.

井深系列 FOR DEEP WELLS

SUS
60HZ

FC
60HZ

AS
Series